

SAP DESCRIPTION:

NC 360608 C

SKU No.

Maximum Flow Rate: 1320 GPM

Recommended Flow Rate: 1056 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4

Scale:

1:35

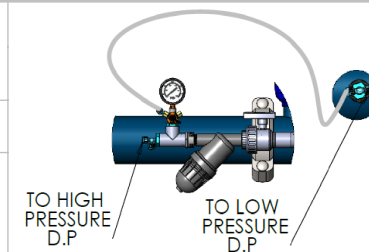

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED.


Designed By	KEREM	03/05/2021
-------------	-------	------------

Drawn By	KEREM	03/05/2021
----------	-------	------------

Checked By		
------------	--	--

QA		
----	--	--

Sheet: 1	Of: 3	Rev. -
----------	-------	--------

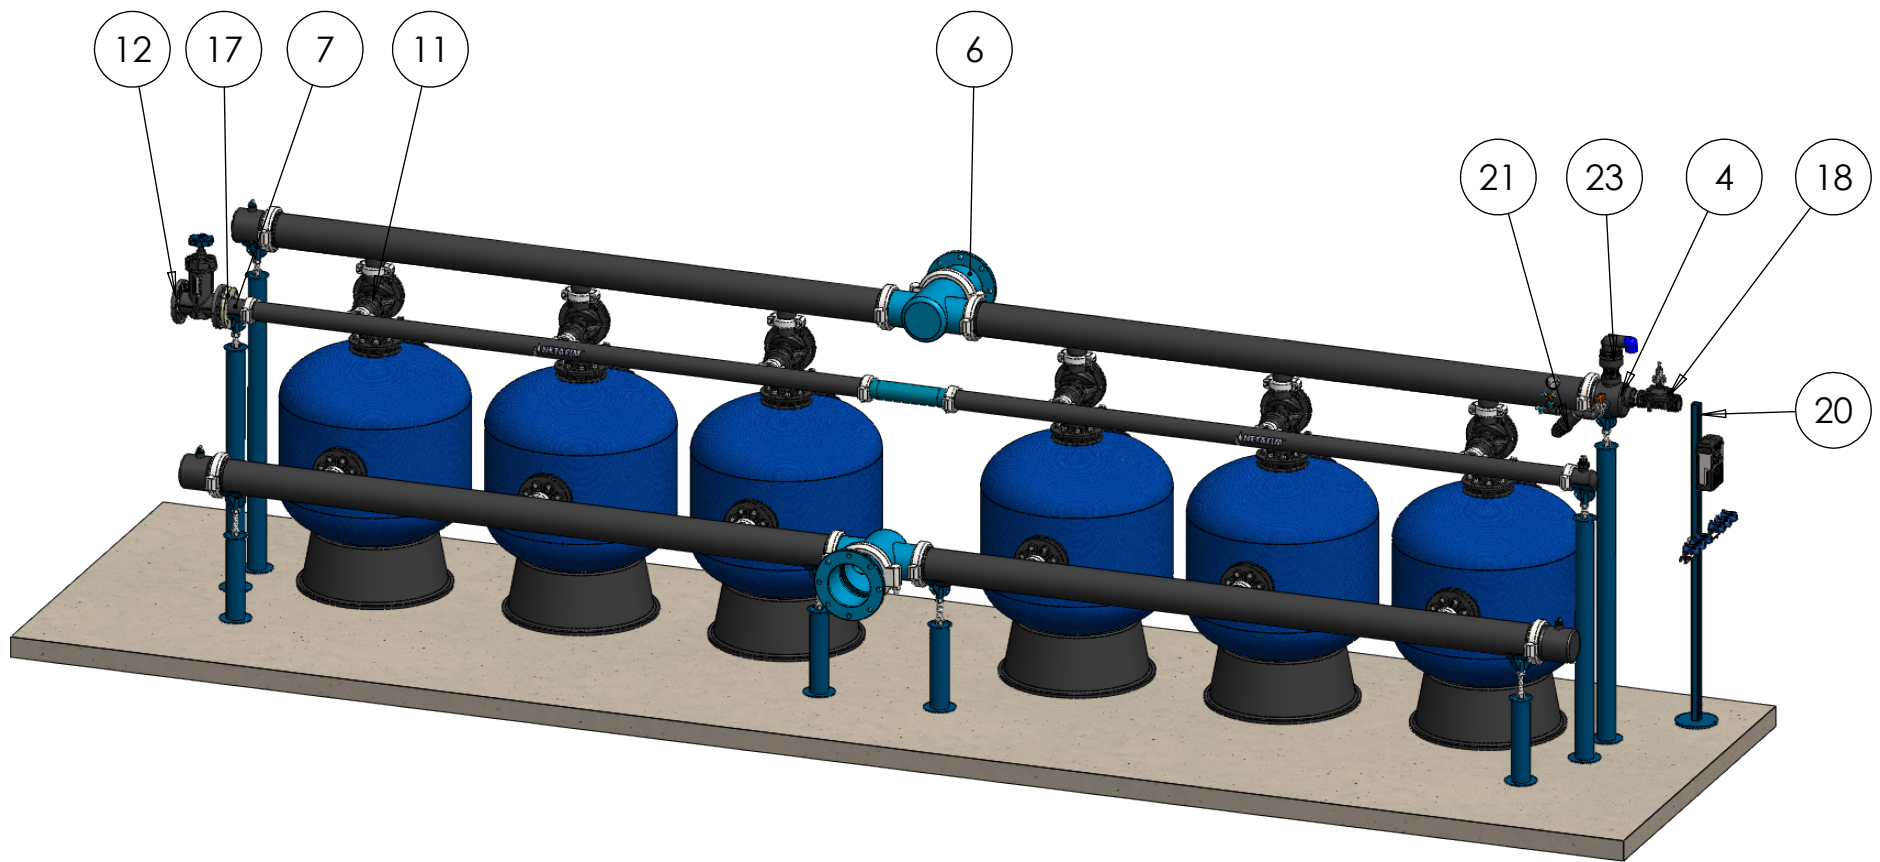

SAP DESCRIPTION:

NC 360608 C

SKU No.

Maximum Flow Rate: 1320 GPM

Recommended Flow Rate: 1056 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4

Scale:

1:35

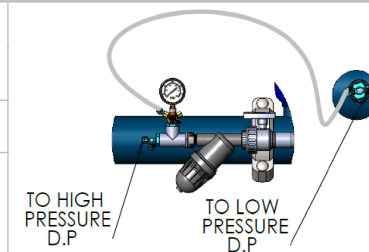

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

Designed By	KEREM	03/05/2021
-------------	-------	------------



Drawn By	KEREM	03/05/2021
----------	-------	------------


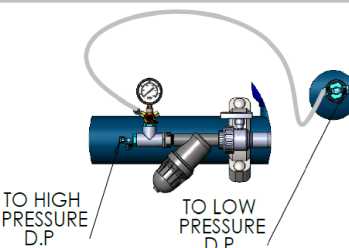
Checked By		
------------	--	--

QA		
----	--	--

Sheet: 2	Of: 3	Rev. -
----------	-------	--------

ITEM NO.	SAP Description	SAP Cat. No.	QTY.
1	SANDSTORM NC TANK 36"X3" VIC	71920-003200	6
2	PE MAN 6"*3 OUT*3" VIC F/36" TANK	71920-002050	4
3	PE BF MAN 3"*3 OUT*2" VIC F/36" TANK	71920-002010	2
4	PE CAP 6"VIC W/1 OUT 3/4"BSP+2 OUT 2"BSP	71920-002489	1
5	PE CAP 6" VIC W/1 OUT 3/4" BSP	71920-002490	3
6	METAL TRANSITION 8" ANSI FLANGE*VIC	71910-002012	2
7	PE STUB END 3" W/O FLANGE	71920-002300	1
8	3"CAP WITH VACUUM BREAKER		1
9	METAL TEE CON 8*6*8 VIC L-420MM	71910-002300	2
10	METAL NIPPLE VIC/VIC 3"*420MM	71910-009000	1
11	DOROT BF valve 3"*2"*3" vic vic vic	71600-006590	6
12	3" THROTTLE VALVE FLANGED TYPE F/BF MAN	71920-000100	1
13	VICTAULIC COUPLING 2" ONE BOLT	71910-002500	6
14	VICTAULIC COUPLING 3" ONE BOLT	71910-002501	22
15	VICTAULIC COUPLING 6" TWO BOLT	71910-002503	8
16	VICTAULIC COUPLING 8" TWO BOLT	71910-002504	2
17	LOOSE FLANGE PP ANSI 90X3"	75090-012405	1
18	S75PL H 2" QRV NPT PP 3WNC R	71600-002338	1
19	Plastic Nipple 2" BSP	75090-012457	1
20	Control stand + controller + Aquative bracket		1
21	CONTROL KIT FOR MEDIA FILTER - BSP	37090-009600	1
22	L.P. Check point (part of control kit)		3
23	BARAK PLASTIC BASE 2 GD-010(NPT)	70561-001500	1
24	SUPPORT LEG 6"X1440 FOR NC	71920-003030	2
25	SUPPORT LEG 3"X1180 FOR NC	71920-003000	2
26	SUPPORT LEG 6"X410 FOR NC	71920-003020	4

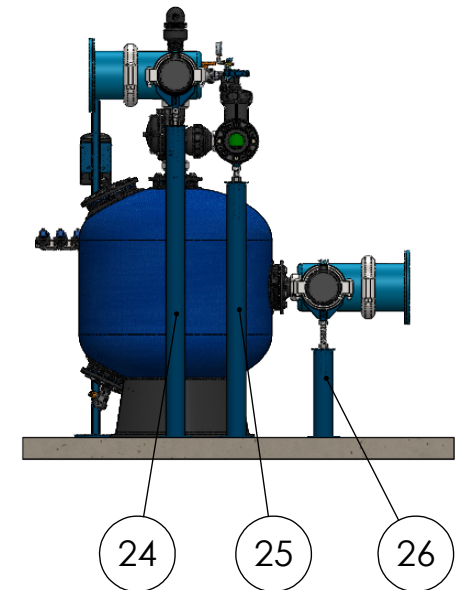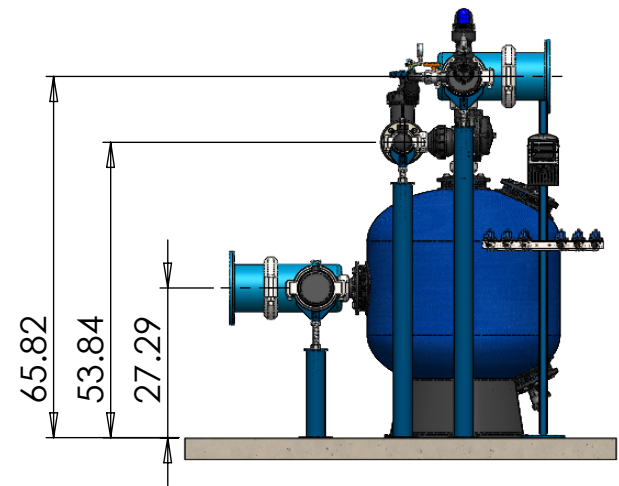

SAP DESCRIPTION: NC 360608 C SKU No.		 <p>NETAFIM™</p> <p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED</p>														
Maximum Flow Rate: 1320 GPM Recommended Flow Rate: 1056 GPM	Inlet Pressure: 115 PSI															
Sheet Size: A4	Scale: 1:35															
<table border="1"> <tr> <td>Designed By</td> <td>KEREM</td> <td>03/05/2021</td> </tr> <tr> <td>Drawn By</td> <td>KEREM</td> <td>03/05/2021</td> </tr> <tr> <td>Checked By</td> <td></td> <td></td> </tr> <tr> <td>QA</td> <td></td> <td></td> </tr> <tr> <td>Sheet: 3</td> <td>Of: 3</td> <td>Rev. -</td> </tr> </table>			Designed By	KEREM	03/05/2021	Drawn By	KEREM	03/05/2021	Checked By			QA			Sheet: 3	Of: 3
Designed By	KEREM	03/05/2021														
Drawn By	KEREM	03/05/2021														
Checked By																
QA																
Sheet: 3	Of: 3	Rev. -														