

STREAMLINE SERIES

FOR SEASONAL ROW CROP IRRIGATION



STREAMLINE 630 SERIES


- **5 mil** - seasonal use in light to medium textured soils with a minimum of rocks or clods or under plastic mulch - must be buried at least 1" under plastic
- **6 mil** - seasonal use, surface or shallow burial (up to 5")
- **8 mil** - seasonal or multi-seasonal use, surface or shallow burial (up to 8")
- **10 mil** - multi-seasonal use, surface or shallow burial (up to 10")
- **13 mil** - multi-seasonal use, durable surface and subsurface use

STREAMLINE 875 SERIES

- **6 mil** - seasonal use, surface or shallow burial (up to 5")
- **8 mil** - seasonal or multi-seasonal use, surface or shallow burial (up to 8")
- **10 mil** - multi-seasonal use, surface or shallow burial (up to 10")
- **13 mil** - multi-seasonal use, durable surface and subsurface use

STREAMLINE SERIES

SPECIFICATION	630 SERIES	875 SERIES
WALL THICKNESS (MIL)	5, 6, 8, 10, 13	6, 8, 10, 13
INSIDE DIAMETER	.638" OR .636"	.875"
NOMINAL FLOW RATES GPH @ 10 PSI	.16, .24, .36	.16, .24, .36
RECOMMENDED FILTRATION	.16 - 140 MESH .24 AND .36 - 120 MESH	

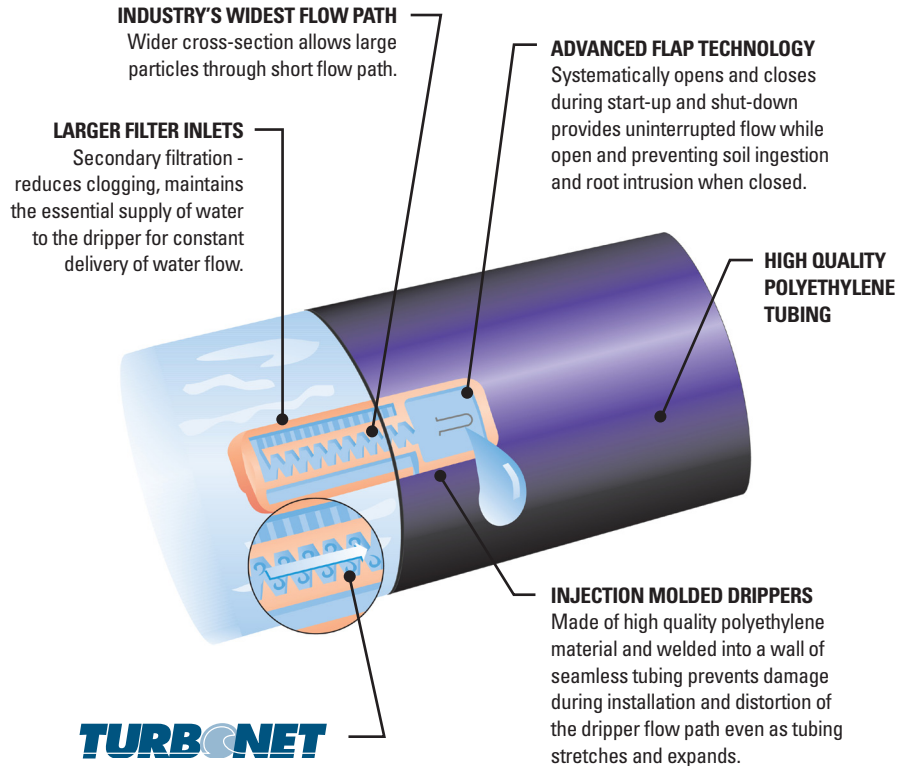

TURBONET

INCREASED FLOW PATH VELOCITY


Improves dripper performance by widening the tooth pattern, maximizing flow path velocity, allowing debris to pass easily through the dripper, virtually eliminating plugging.

PRODUCT ADVANTAGES

- Seamless construction is stronger and more durable than comparable drip tape
- Fortifies against splitting or bursting under high pressures required for proper flushing
- Flap outlet protection impedes soil ingestion and root intrusion
- Dripperlines packaged with more feet per reel, the industry's longest, requiring fewer fittings and less time changing reels during installation

TECHNICAL INFORMATION

FLOW RATE VS. PRESSURE

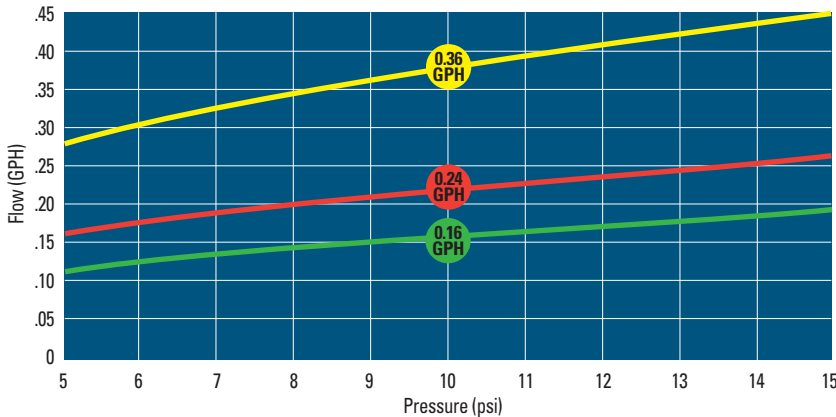

MAXIMUM PRESSURE RANGES

WALL THICKNESS	OPERATING (psi)	FLUSHING (psi)
630 SERIES 5 MIL	10	15.0
630 SERIES 6 MIL	12	17.4
630 SERIES 8 MIL	15	21.8
630 SERIES 10 MIL	17	26.1
630 SERIES 13 MIL	26	39.2
875 SERIES 6 MIL	10	14.9
875 SERIES 8 MIL	12	17.4
875 SERIES 10 MIL	15	21.8
875 SERIES 13 MIL	22	32.7

STREAMLINE 630 SERIES - LENGTH OF RUN @ 0% SLOPE AND 10 PSI

DRIPPER SPACING	GPM PER 100 FT @ 94% EU			94% EU			92% EU			90% EU		
	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH
8"	0.344	0.542	0.828	455	339	258	549	409	313	625	466	355
9"	0.305	0.482	0.734	494	368	281	597	445	340	679	506	386
10"	0.275	0.434	0.662	531	396	302	642	479	365	731	545	416
12"	0.229	0.362	0.552	602	449	342	728	543	414	828	618	471
14"	.0196	0.310	0.472	669	499	381	809	604	461	920	687	524
16"	0.172	0.271	0.413	731	546	417	885	661	505	1,007	751	574
18"	0.153	0.241	0.367	791	590	451	958	715	547	1,090	814	622
20"	0.138	0.217	0.331	848	634	484	1,028	768	586	1,169	873	668
24"	0.115	0.181	0.276	959	715	547	1,159	865	661	1,319	985	753

STREAMLINE 875 SERIES - LENGTH OF RUN @ 0% SLOPE AND 10 PSI

DRIPPER SPACING	GPM PER 100 FT @ 94% EU			94% EU			92% EU			90% EU		
	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH	0.16 GPH	0.24 GPH	0.36 GPH
10"	0.295	0.435	0.663	890	720	550	1,082	872	666	1,231	993	759
12"	0.246	0.362	0.552	1,004	810	619	1,218	980	749	1,389	1,116	853
14"	0.211	0.311	0.473	1,111	894	684	1,349	1,083	828	1,537	1,234	943
16"	0.184	0.272	0.414	1,213	975	745	1,471	1,181	902	1,678	1,345	1,027
18"	0.164	0.241	0.368	1,309	1,051	803	1,589	1,273	973	1,813	1,450	1,108
20"	0.147	0.217	0.331	1,403	1,126	861	1,703	1,363	1,041	1,941	1,551	1,186
24"	0.123	0.181	0.276	1,579	1,265	967	1,917	1,531	1,171	2,185	1,743	1,333

PACKAGING DATA

WALL THICKNESS	REEL LENGTH	REEL WEIGHT	REELS PER PALLET	PALLET WEIGHT
630 SERIES 5 MIL	13,000'	58 LBS.	16	973 LBS.
630 SERIES 6 MIL	11,500'	63 LBS.	16	1,053 LBS.
630 SERIES 8 MIL	9,000'	61 LBS.	16	1,021 LBS.
630 SERIES 10 MIL	7,500'	65 LBS.	16	1,085 LBS.
630 SERIES 13 MIL	5,000'	53 LBS.	16	893 LBS.
875 SERIES 6 MIL	8,000'	60 LBS.	16	1,005 LBS.
875 SERIES 8 MIL	6,000'	56 LBS.	16	941 LBS.
875 SERIES 10 MIL	5,500'	65 LBS.	16	1,085 LBS.
875 SERIES 13 MIL	4,000'	64 LBS.	16	1,069 LBS.

PACKAGING DATA FOR 630 and 875 SERIES: Uses 22" x 11" cardboard reels with 1/2" hub hole. Weights are approximate. Pallet weight includes 45 lbs. for weight of pallet. Reels per pallet and pallet weights listed are for standard reel lengths only. Length of reels and reels per pallet may change for custom reel lengths.



NETAFIM USA
 5470 E. Home Ave.
 Fresno, CA 93727
 CS 888 638 2346
 F 800 695 4753
www.netafimusa.com