

VALVES


Ordering Guidelines

Please provide the following information when calling for assistance.

- Flow Rate
- Inlet Pressure
- Desired Outlet Pressure
- Topographical Details
- Pump Curve, Type, etc.

How to Determine Correct Valve Model Number

- Select Function
- Select Diameter
- Select Required Material and End Connection
- Select Diaphragm based on Upstream Pressure
- Select Spring Color (for Pilot Operated Valves Only)

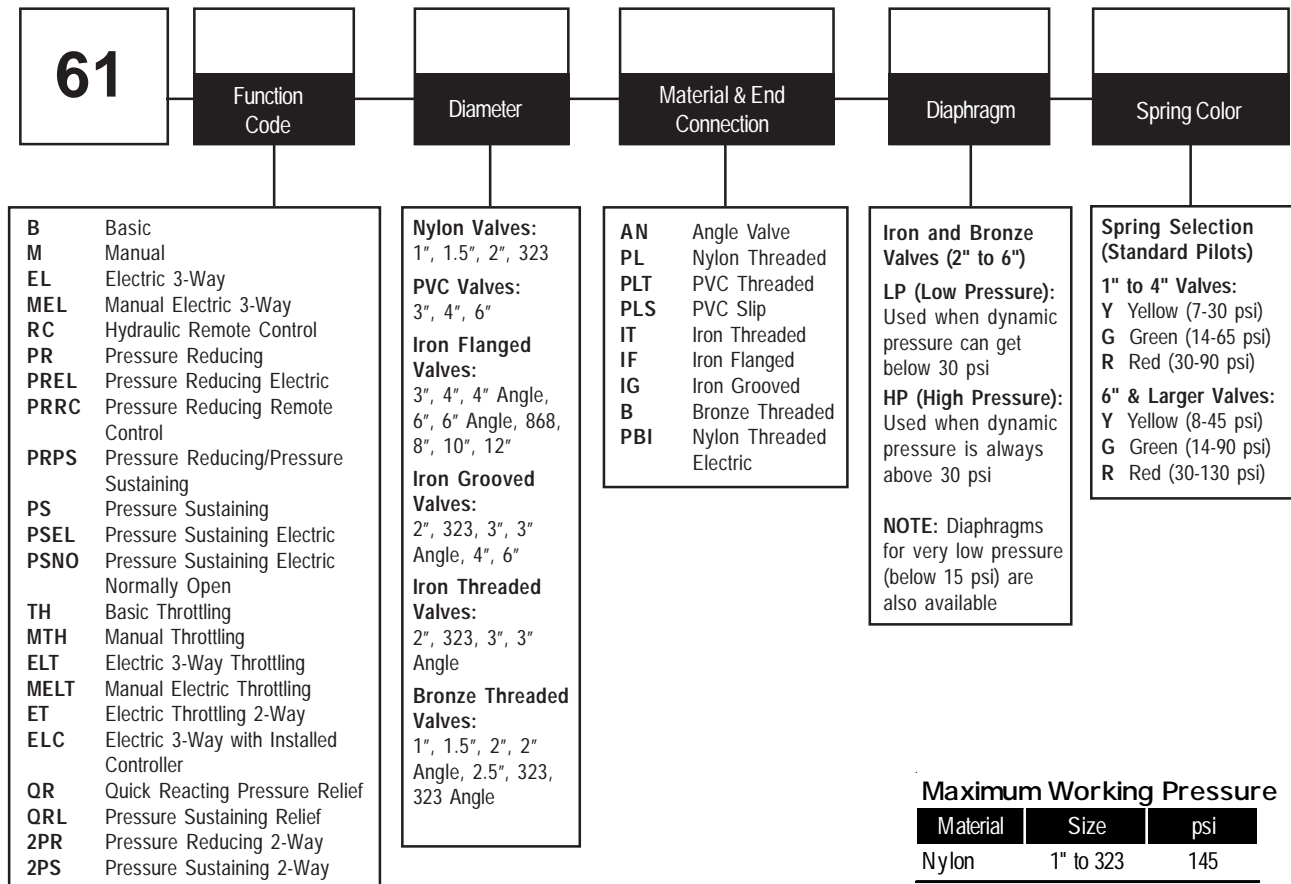

NOTE: All Electric Valves are standard with 24VAC Solenoids. Other voltages available by special order.

Maximum Working Pressure

Material	Size	psi
Nylon	1" to 323	145
PVC	3" and 4"	115
PVC	6"	145
Bronze	3/4" to 323	235
Iron	2" to 24"	235

Maximum Recommended Flow Rates (GPM)

3/4"	1"	1 1/2"	2"	323	3" AN	3"	4"	6"	868	8"	10"	12"	16"	20"	24"
30	50	90	175	225	350	390	600	1,300	1,500	2,000	3,500	4,800	9,600	14,000	16,000