




1" Continuous Acting Air Vent

for Gold Mines

NPT Threaded Continuous Acting Air Vent

AUTOMATIC AIR Discharge Chart

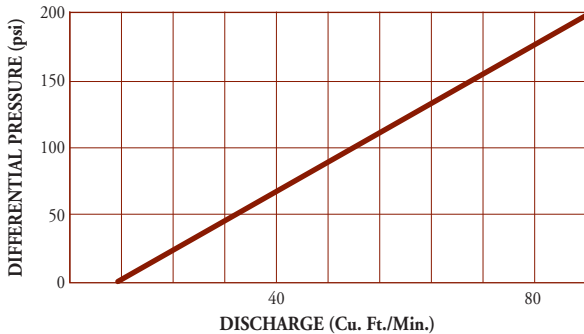

Product Advantages

- Lightweight, small dimensions, simple and reliable structure.
- The body is made of metal casting, and all operating parts are made of specially selected corrosion resistant materials.
- Vandalism protected by a metal casting body.
- Standard metal body - baked polyester coating.

Patented rolling seal mechanism:

- Dramatically reduces the possibility of obstruction by debris.
- Discharges high air flow rates up to 94 f3/m.
- One size orifice for a wide pressure range (up to 230 psi).
- Self-cleaning mechanism.

DIMENSIONS AND WEIGHTS

Nominal Size	Dimensions (in.)		Weight (lbs.)	Orifice Area (Sq. In.)	
	A	B		65S050C	65S052
1/2, 3/4, 1	3 11/32	5 27/32	3.6	0.0186	0.0139



Specifications

Working pressure range: 3-230 psi.
Available Size: 1" NPT threaded.


ORDERING INFORMATION

Nominal Size	Part Number	Material
1"	65S050C1	Iron Casted



NETAFIM USA
5470 E. Home Ave. • Fresno, CA 93727
888.638.2346 • 559.453.6800
FAX 800.695.4753
www.netafimusa.com

1" Continuous Acting Air Vent for Gold Mines Specifications

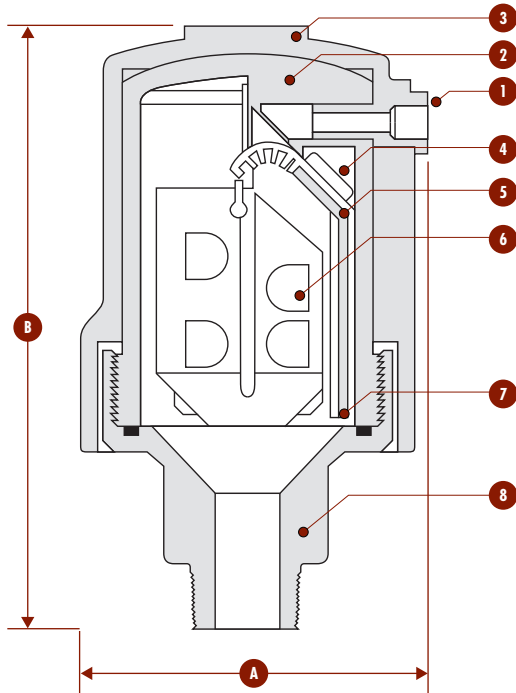

Parts List and Specifications

No.	Part	Material
1.	Threaded Outlet	Stainless Steel 316
2.	Body - 230 psi	Cast Iron ASTM A-48 CL.20B
3.	Sleeve	Reinforced Nylon
4.	Rolling Seal	Rubber E.P.D.M.
5.	Clamping Stem	Reinforced Nylon
6.	Float	Foamed Polypropylene
7.	O-Ring	BUNA-N
8.	Base	Stainless Steel 316

Netafim USA - Delivering Total System Solutions for Mining

• Dripperlines • Filters • Valves • Air Vents • Sprinklers • Flow Meters



For more information call Netafim USA
Customer Service at (888) 638-2346.