

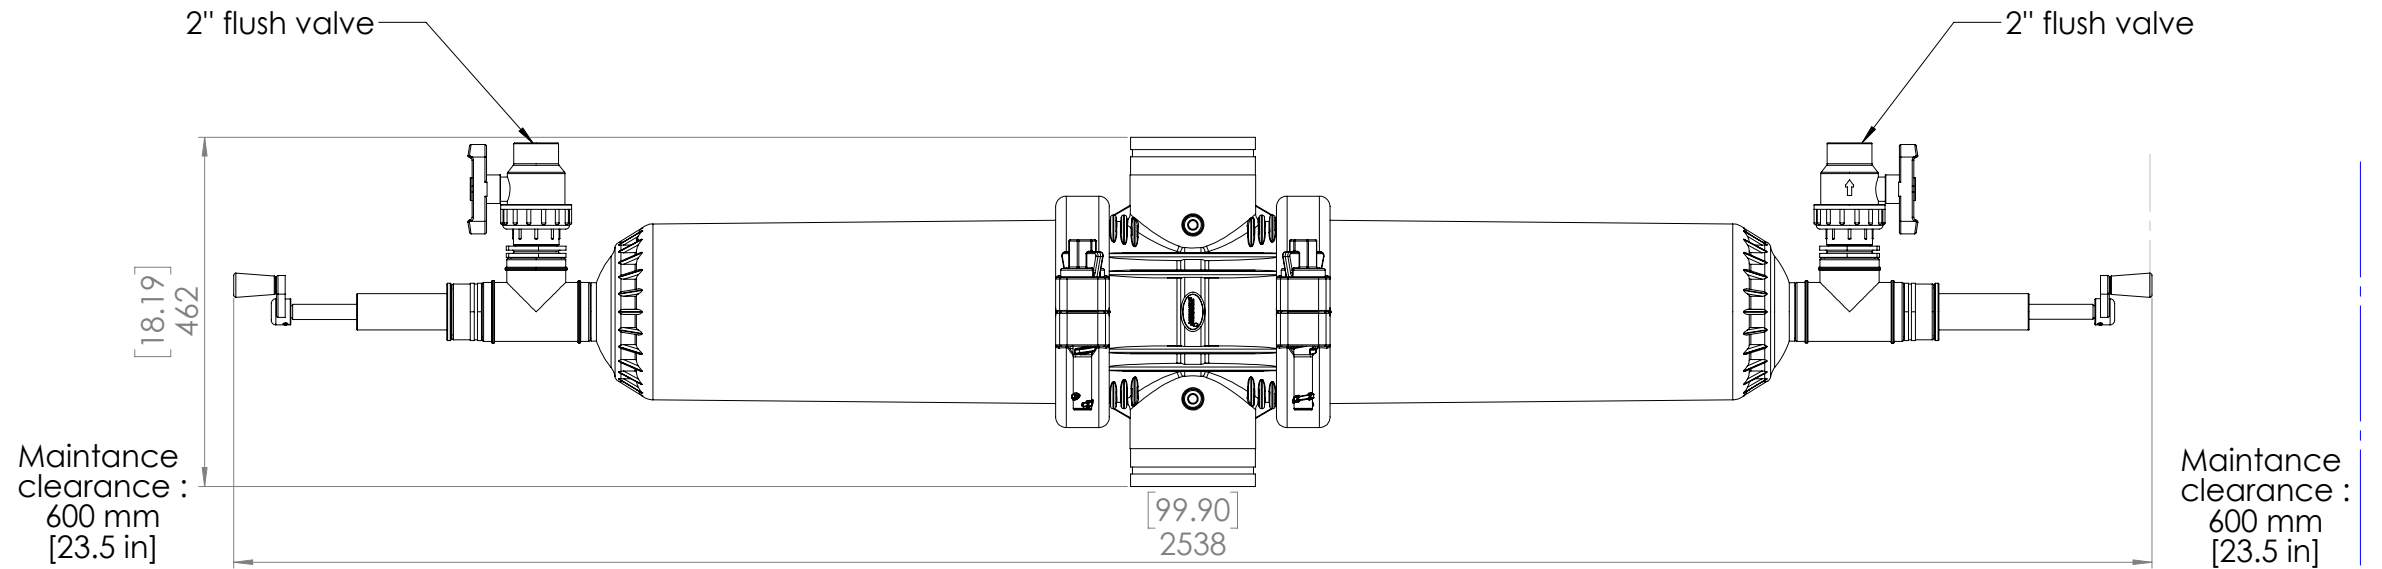
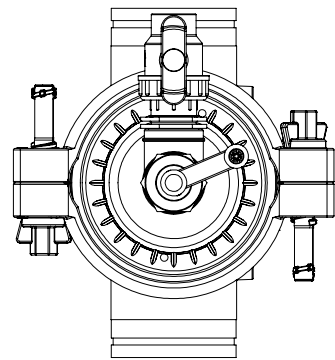
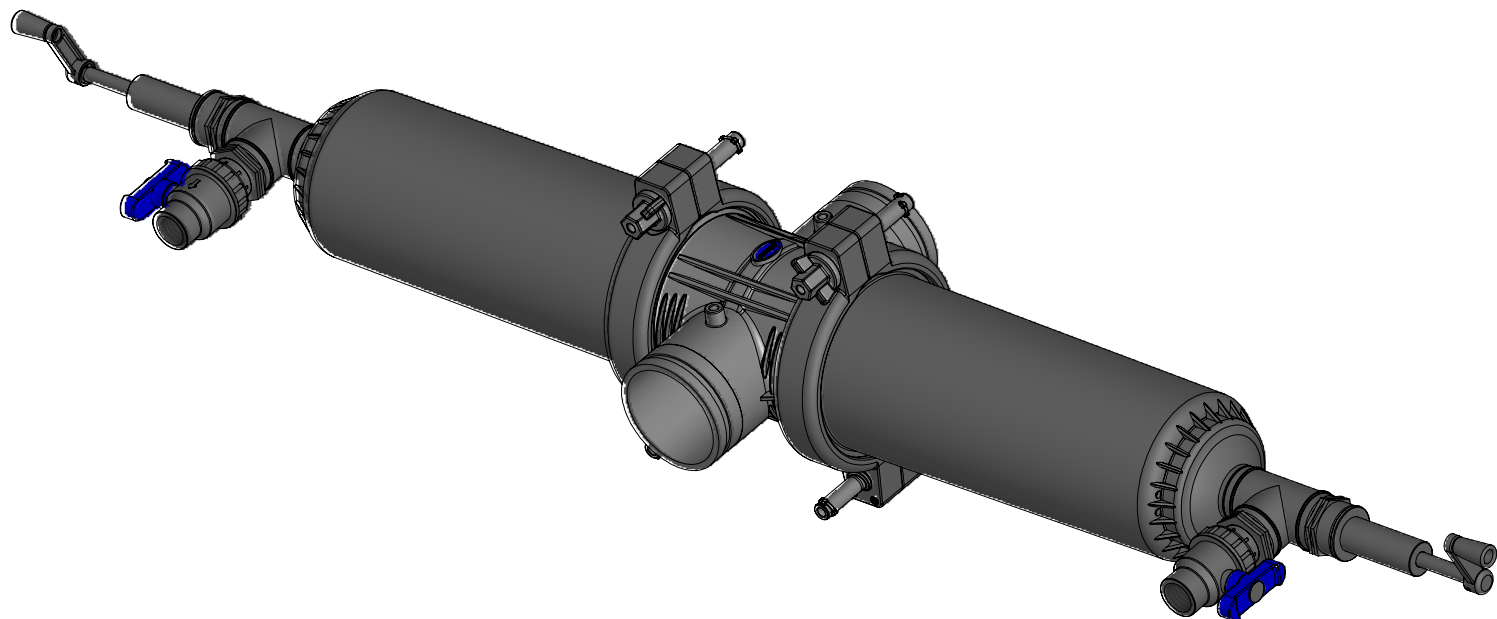



6" Plastic filter


- Semi automatic suction clean mechanism
- Gross screen area : 5550 sq. cm [860 sq. in]
- Net screen area : 4223 sq. cm [654 sq. in]
- 28 Kg [62 Pounds]
- Universal flange or Victualic connection
- PN6
- 2 X 2" [BSP socket] flush valves
- pressure difference indicator
- Fully plastic, Stainless steel screen, NBR sealers

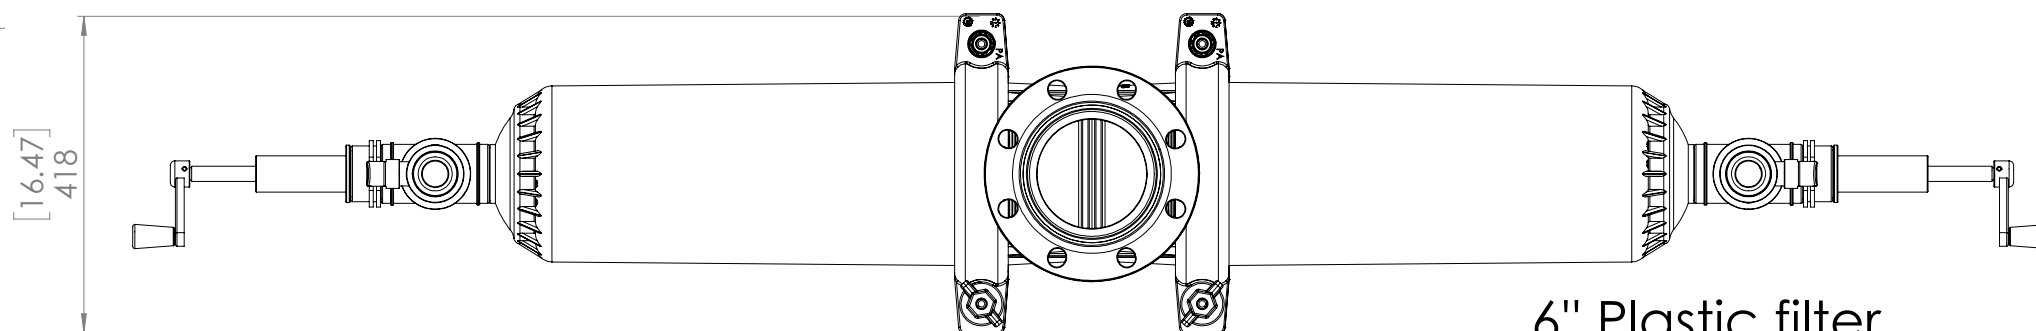



REV.		DESCRIPTION					DATE		APPROVED																																																		
Material:		PA6		Project:		SCREEN GUARD					 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED Designed By Drawn By Checked By QA																																																
Finish:				Subject:		SEMI AUTO PLASTIC FILTERS																																																					
Drawing No.		/1		Part Name:		SG PL 6" SEMI AUTO D																																																					
Part No.		Quantity:		General Tolerance According to ISO 2768-f					Drawn By																																																		
				LINEAR DIMENSIONS					ANGULAR DIMENSIONS		Checked By																																																
3-D Proj.		Sheet Size:		Scale:		Permissible deviations in mm for ranges in nominal lengths					Permissible deviations in degrees and minutes for ranges in nominal lengths		QA																																														
		A3		1:20		<table><tr><td>≥ 0.5</td><td>> 3</td><td>> 6</td><td>> 30</td><td>> 120</td><td>> 400</td><td>> 1000</td><td>> 2000</td><td>≤ 10</td><td>> 10</td><td>> 50</td><td>> 120</td><td>> 400</td></tr><tr><td>≤ 3</td><td>≤ 6</td><td>≤ 30</td><td>≤ 120</td><td>≤ 400</td><td>≤ 1000</td><td>≤ 2000</td><td>≤ 4000</td><td>≤ 1°</td><td>≤ 50</td><td>≤ 120</td><td>≤ 400</td><td>≤ 10°</td></tr><tr><td>±0.05</td><td>±0.05</td><td>±0.1</td><td>±0.15</td><td>±0.2</td><td>±0.3</td><td>±0.5</td><td>-</td><td>±1°</td><td>±0°30'</td><td>±0°20'</td><td>±0°10'</td><td>±0°5'</td></tr></table>					≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10	> 10	> 50	> 120	> 400	≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 1°	≤ 50	≤ 120	≤ 400	≤ 10°	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'	±1°		±0°30'	±0°20'	±0°10'	±0°5'	Sheet: 1		Of: 4	Rev.
≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10	> 10	> 50	> 120	> 400																																															
≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 1°	≤ 50	≤ 120	≤ 400	≤ 10°																																															
±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'																																															
File Name: SG PL 6 S - instlation drawings.sldrw																																																											

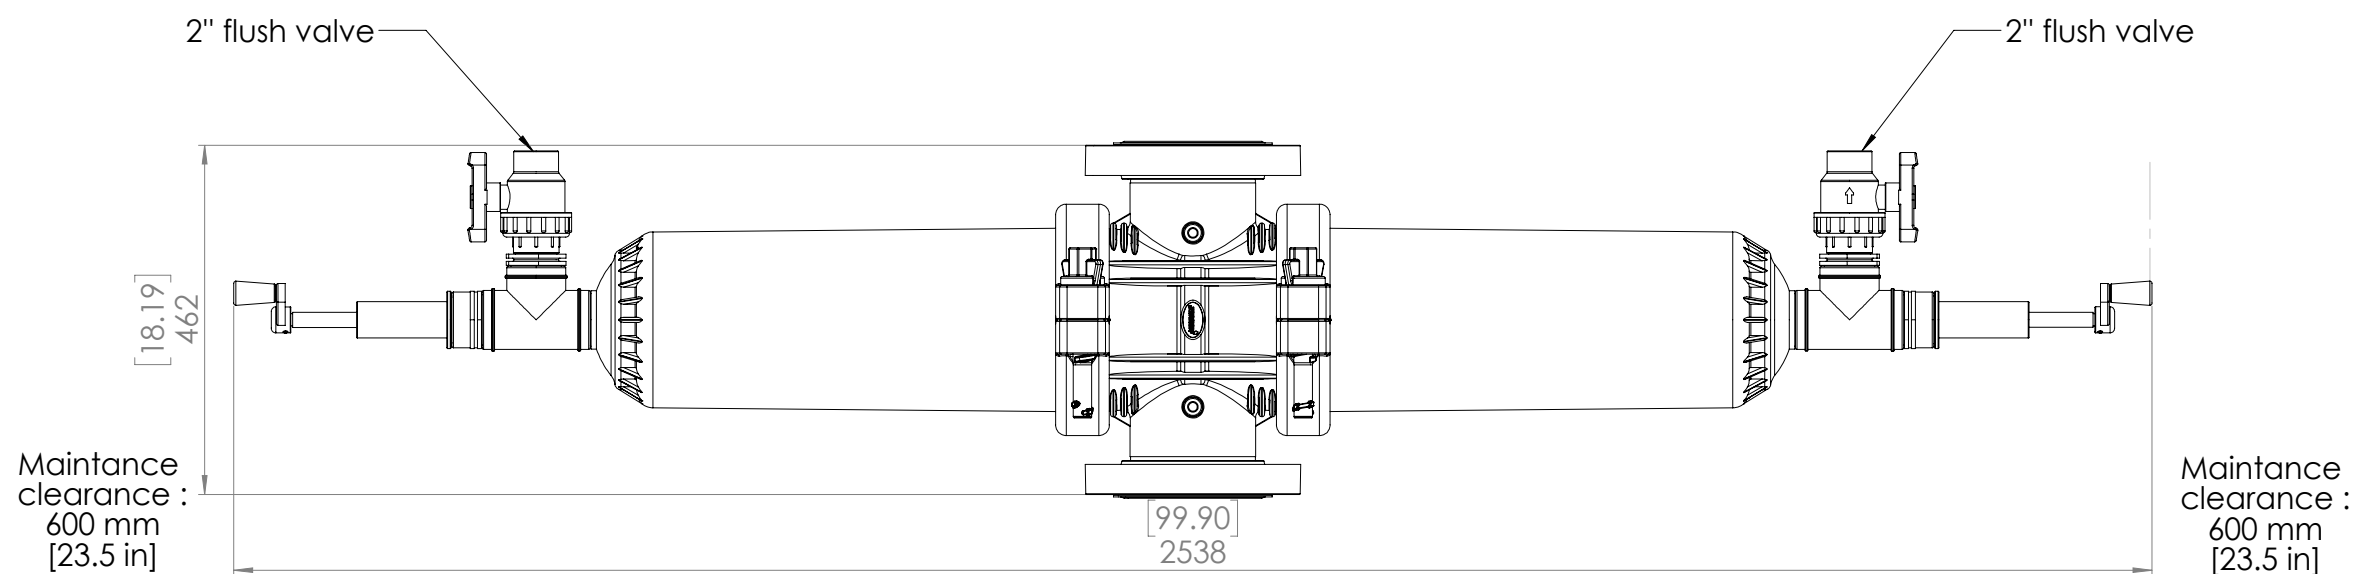


- Semi automatic suction clean mechanism
- Gross screen area : 5550 sq. cm [860 sq. in]
- Net screen area : 4223 sq. cm [654 sq. in]
- 28 Kg [62 Pounds)
- Universal flange or Victualic connection
- PN6
- 2 X 2" [BSP socket] flush valves
- pressure difference indicatior
- Fully plastic, Stainless steel screen, NBR sealers

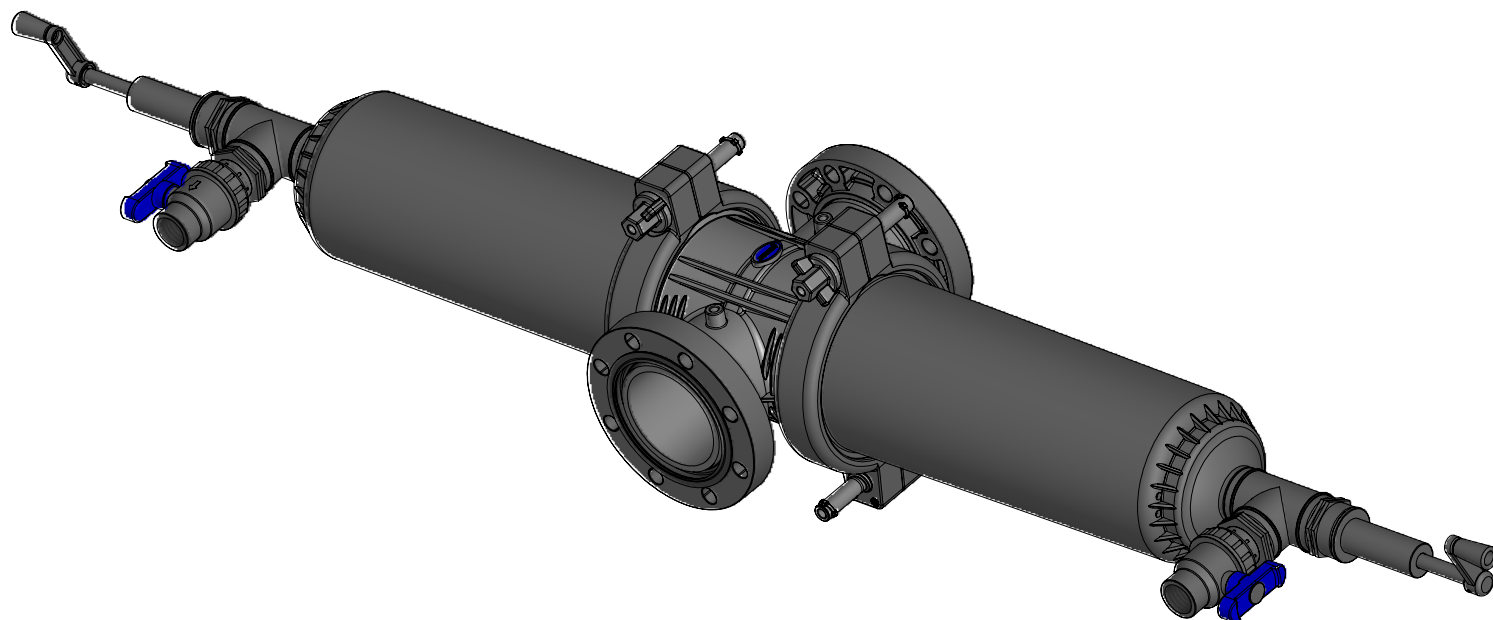

REV.		DESCRIPTION										DATE		APPROVED																																												
Material:		PA6		Project:		SCREEN GUARD										 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED.																																										
Finish:				Subject:		SEMI AUTO PLASTIC FILTERS																																																				
Drawing No.		/2		Part Name:		SG PL 6" SEMI AUTO D																																																				
Part No.		Quantity:		General Tolerance According to ISO 2768-f										Drawn By																																												
				LINEAR DIMENSIONS										Checked By																																												
3-D Proj.		Sheet Size:		Scale:		Permissible deviations in mm for ranges in nominal lengths										Permissible deviations in degrees and minutes for ranges in nominal lengths		QA																																								
		A3		1:20		<table><tr><td>≥ 0.5</td><td>> 3</td><td>> 6</td><td>> 30</td><td>> 120</td><td>> 400</td><td>> 1000</td><td>> 2000</td><td>≤ 10</td><td>> 10</td><td>> 50</td><td>> 120</td><td>> 400</td></tr><tr><td>≤ 3</td><td>≤ 6</td><td>≤ 30</td><td>≤ 120</td><td>≤ 400</td><td>≤ 1000</td><td>≤ 2000</td><td>≤ 4000</td><td>≤ 5</td><td>≤ 50</td><td>≤ 120</td><td>≤ 400</td><td>≤ 1000</td></tr><tr><td>±0.05</td><td>±0.05</td><td>±0.1</td><td>±0.15</td><td>±0.2</td><td>±0.3</td><td>±0.5</td><td>-</td><td>±1°</td><td>±0°30'</td><td>±0°20'</td><td>±0°10'</td><td>±0°5'</td></tr></table>										≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10	> 10	> 50	> 120	> 400	≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 5	≤ 50	≤ 120	≤ 400	≤ 1000	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'				
≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10	> 10	> 50	> 120	> 400																																														
≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 5	≤ 50	≤ 120	≤ 400	≤ 1000																																														
±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'																																														
File Name: SG PL 6 S - instlation drawings.slddw														Sheet: 2		Of: 4		Rev.																																								

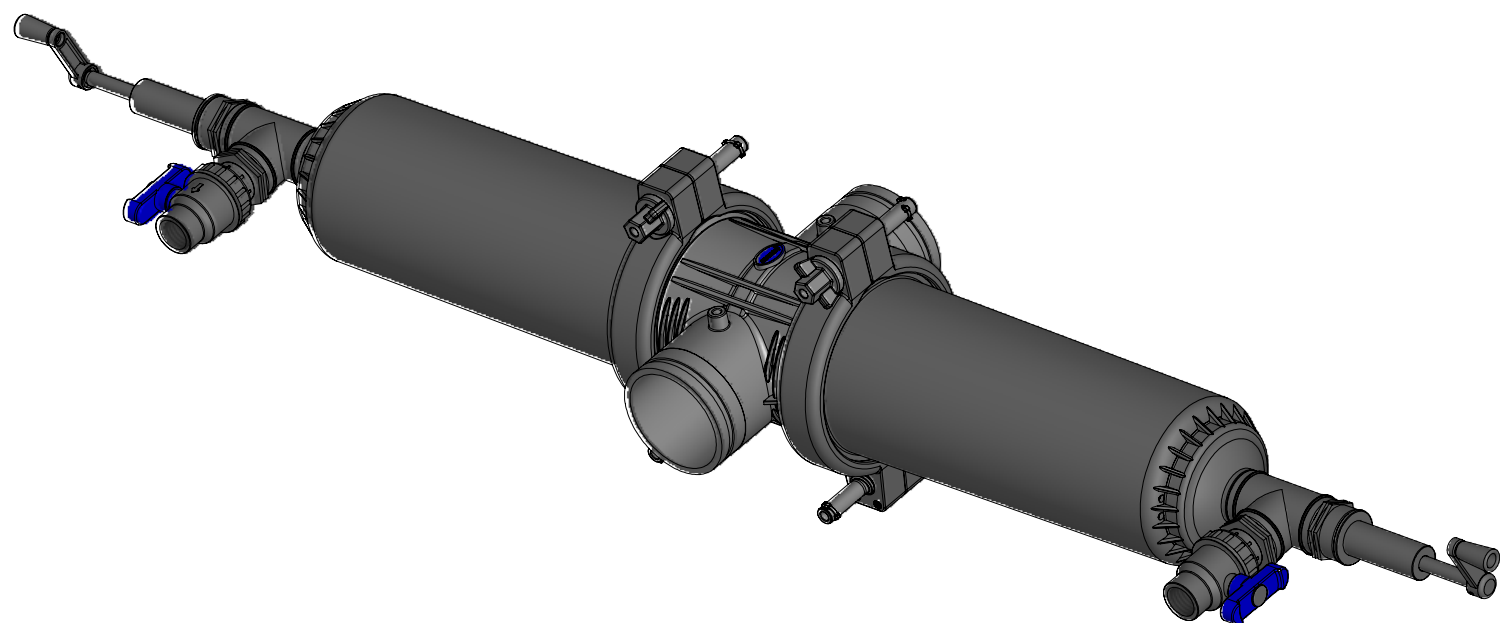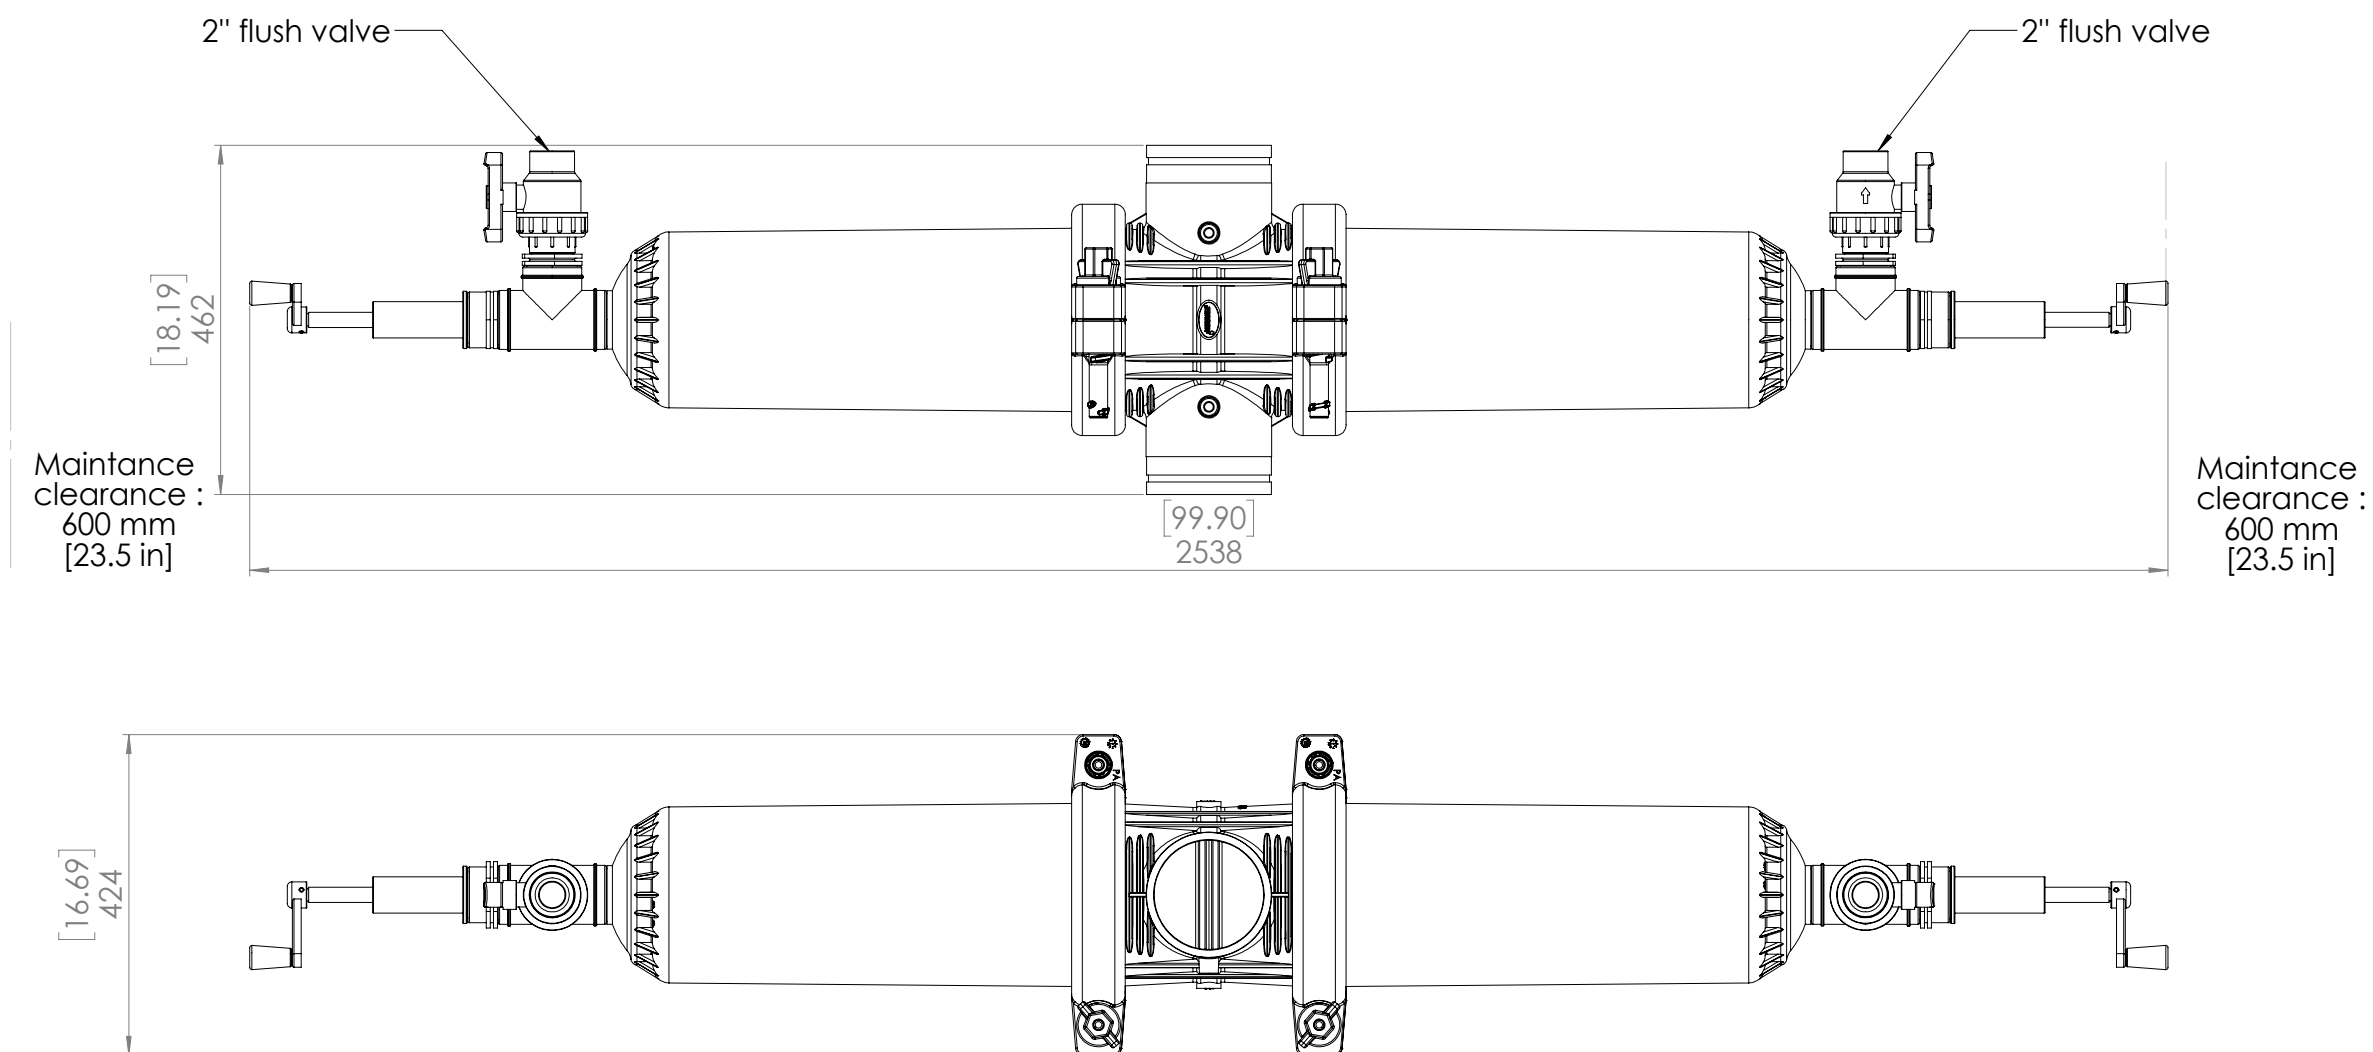

REV.		DESCRIPTION										DATE		APPROVED																																												
Material:		PA6		Project:		SCREEN GUARD										 NETAFIM™ PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED																																										
Finish:				Subject:		SEMI AUTO PLASTIC FILTERS																																																				
Drawing No.		/3		Part Name:		SG PL 6" SEMI AUTO D																																																				
Part No.		Quantity:		General Tolerance According to ISO 2768-f										Drawn By																																												
				LINEAR DIMENSIONS										Checked By																																												
3-D Proj.		Sheet Size:		Scale:		Permissible deviations in mm for ranges in nominal lengths										QA																																										
		A3		1:20		<table><tr><td>≥ 0.5</td><td>> 3</td><td>> 6</td><td>> 30</td><td>> 120</td><td>> 400</td><td>> 1000</td><td>> 2000</td><td>≤ 10°</td><td>> 10°</td><td>> 50°</td><td>> 120°</td><td>> 400°</td></tr><tr><td>≤ 3</td><td>≤ 6</td><td>≤ 30</td><td>≤ 120</td><td>≤ 400</td><td>≤ 1000</td><td>≤ 2000</td><td>≤ 4000</td><td>≤ 5°</td><td>≤ 30°</td><td>≤ 120°</td><td>≤ 400°</td><td></td></tr><tr><td>±0.05</td><td>±0.05</td><td>±0.1</td><td>±0.15</td><td>±0.2</td><td>±0.3</td><td>±0.5</td><td>-</td><td>±1°</td><td>±0°30'</td><td>±0°20'</td><td>±0°10'</td><td>±0°5'</td></tr></table>										≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10°	> 10°	> 50°	> 120°	> 400°	≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 5°	≤ 30°	≤ 120°	≤ 400°		±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'				
≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 10°	> 10°	> 50°	> 120°	> 400°																																														
≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	≤ 5°	≤ 30°	≤ 120°	≤ 400°																																															
±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	±1°	±0°30'	±0°20'	±0°10'	±0°5'																																														
File Name: SG PL 6 S - instalation drawings.slddrw														Sheet: 3		Of: 4		Rev.																																								




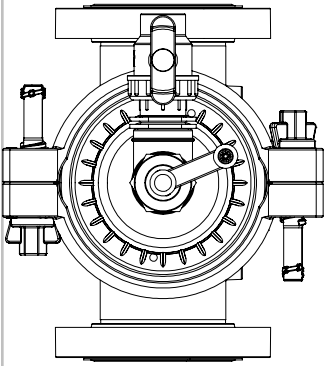


2" flush valve

2" flush valve

Maintance
clearance :
600 mm
[23.5 in]

Maintance
clearance :
600 mm
[23.5 in]

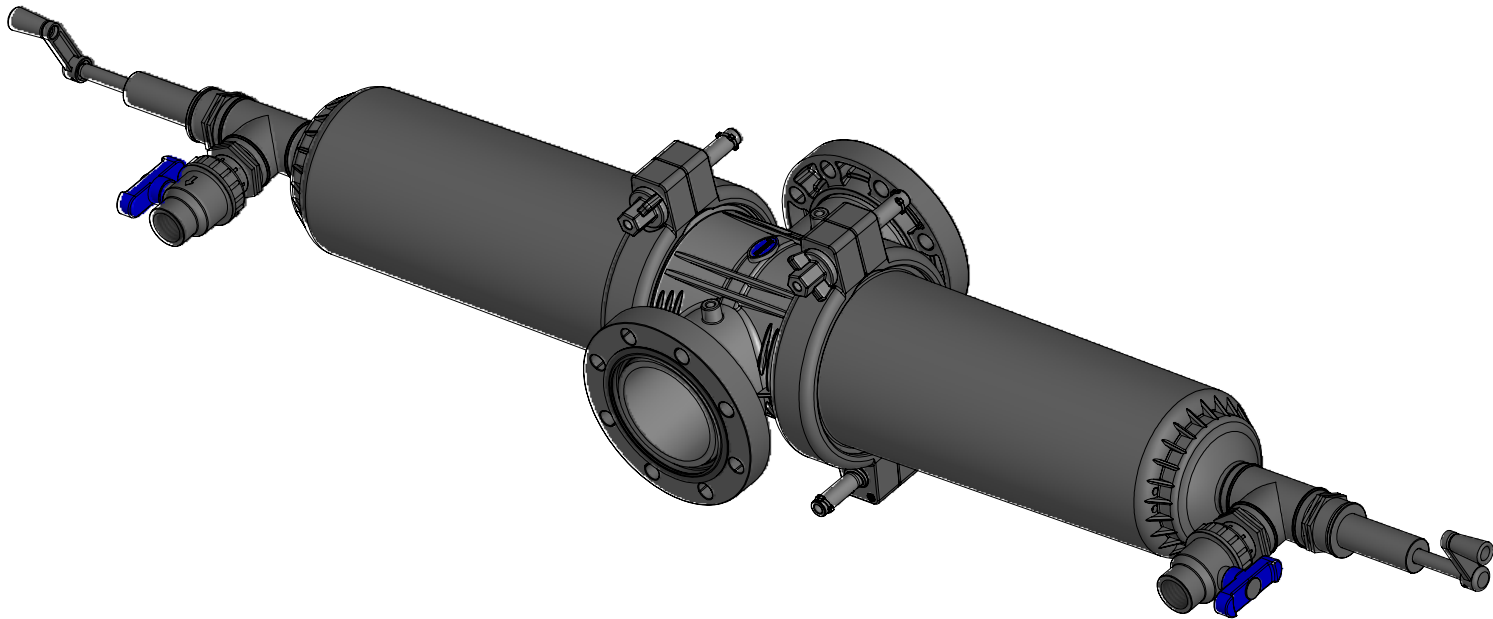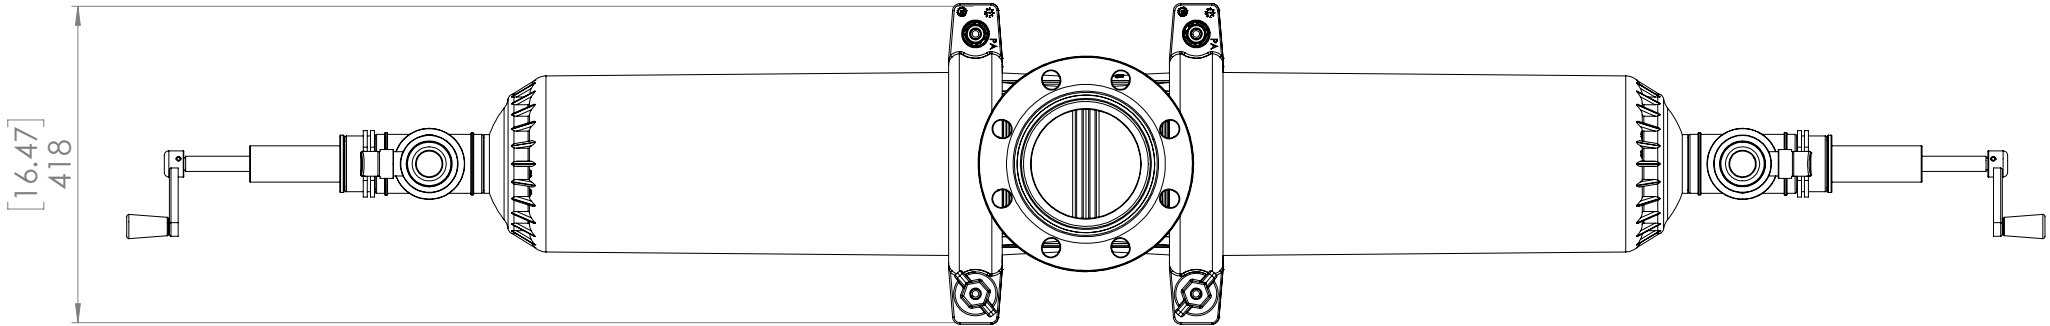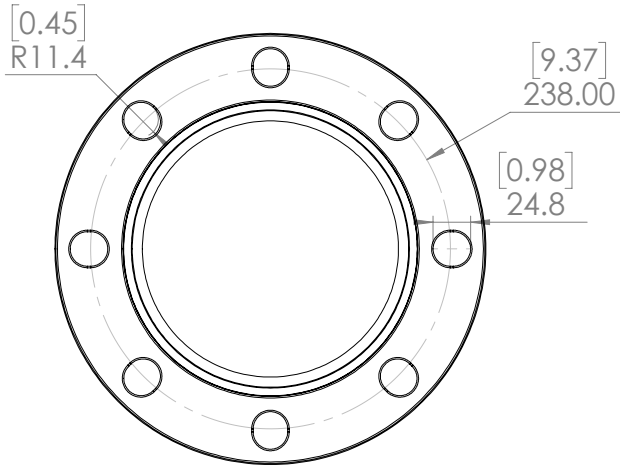

REV.		DESCRIPTION					DATE		APPROVED																																							
Material:		PA6		Project:		SCREEN GUARD					 PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED. Designed By <table border="1" data-bbox="2757 1864 2849 1890"></table>																																					
Finish:				Subject:		SEMI AUTO PLASTIC FILTERS						Drawn By <table border="1" data-bbox="2757 1911 2849 1936"></table>																																				
Drawing No.		/4		Part Name:		SG PL 6" SEMI AUTO D							Checked By <table border="1" data-bbox="2757 1957 2849 1982"></table>																																			
Part No.		Quantity:		General Tolerance According to ISO 2768-f					QA <table border="1" data-bbox="2757 2003 2849 2028"></table>			Sheet: 4 Of: 4 Rev.																																				
				LINEAR DIMENSIONS					ANGULAR DIMENSIONS																																							
3-D Proj.		Sheet Size:		Scale:		Permissible deviations in mm for ranges in nominal lengths					Permissible deviations in degrees and minutes for ranges in nominal lengths																																					
		A3		1:20		<table border="1" data-bbox="1941 2001 2389 2034"><tr><td>≥ 0.5</td><td>> 3</td><td>> 6</td><td>> 30</td><td>> 120</td><td>> 400</td><td>> 1000</td><td>> 2000</td></tr><tr><td>≤ 3</td><td>≤ 6</td><td>≤ 30</td><td>≤ 120</td><td>≤ 400</td><td>≤ 1000</td><td>≤ 2000</td><td>≤ 4000</td></tr><tr><td>+0.05</td><td>+0.05</td><td>+0.1</td><td>+0.15</td><td>+0.2</td><td>+0.3</td><td>+0.5</td><td>-</td></tr></table>					≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000	≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000	+0.05	+0.05	+0.1	+0.15	+0.2	+0.3	+0.5	-	<table border="1" data-bbox="2401 2001 2665 2034"><tr><td>≤ 10°</td><td>> 10°</td><td>> 50°</td><td>> 120°</td><td>> 400°</td></tr><tr><td>≤ 50°</td><td>≤ 120°</td><td>≤ 400°</td><td>± 0°10'</td><td>± 0°5'</td></tr></table>		≤ 10°	> 10°	> 50°	> 120°	> 400°	≤ 50°	≤ 120°	≤ 400°	± 0°10'	± 0°5'		
≥ 0.5	> 3	> 6	> 30	> 120	> 400	> 1000	> 2000																																									
≤ 3	≤ 6	≤ 30	≤ 120	≤ 400	≤ 1000	≤ 2000	≤ 4000																																									
+0.05	+0.05	+0.1	+0.15	+0.2	+0.3	+0.5	-																																									
≤ 10°	> 10°	> 50°	> 120°	> 400°																																												
≤ 50°	≤ 120°	≤ 400°	± 0°10'	± 0°5'																																												
File Name: SG PL 6 S - instlation drawings.slddrw																																																