

# TECHLOCK FITTINGS

Maximum Performance  
and Durability

## 17mm FITTINGS

### APPLICATIONS

- Fits Techline HCVXR, HCVXR-RW and RWP, CV, DL, RW and RWP driplines, and PE tubing

### SPECIFICATIONS

- Tubing internal diameter: 0.530" - 0.560"
- Tubing wall thickness: 0.035" - 0.050"
- Tubing outside diameter: 0.600" - 0.660"
- Working temperature range: 32° F - 140° F
- Operating pressure: 0 to 100 psi
- Pull-out resistance: 67 ft-lbs.
- Warranty:  
10 years for below ground (subsurface) installations  
5 years for above ground (surface) installations

### FEATURES & BENEFITS



#### SIMPLE AND EFFICIENT INSTALLATION WITH REDUCED PHYSICAL STRAIN

Ergonomic design enables quick field installation and reuse while reducing physical strain on installation crews.

#### INDUSTRY LEADING PRESSURE RATING

Get maximum performance and durability with our industry leading pressure rating and pullout resistance.

#### WARRANTY ENSURES CONFIDENCE

Specifiers, contractors and distributors will have peace of mind with our warranty - 10 years for subsurface installations and 5 years for surface installations.

#### SIZE RANGE FLEXIBILITY


16mm and 17mm outside diameter size range simplifies the job for designers and contractors.

#### VISUALLY APPEALING COLOR

Dark brown color blends well with both the dripline and surrounding landscapes.

#### TECHLOCK ELBOW FITTING

Barb ends fit securely on the tubing while the techlock threaded caps and compression rings ensure a tight seal.

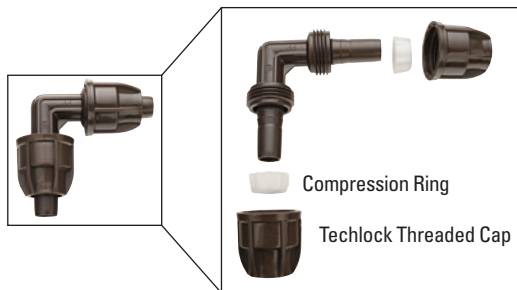

**TECHLOCK COUPLER**  
Model TLCKCOUP



**TECHLOCK ELBOW**  
Model TLCKELL



**TECHLOCK 3/4" MPT ADAPTER**  
Model TLCK075MA



**TECHLOCK TEE**  
Model TLCKTEE