




Check Valves

for Gold Mines

Durable and Dependable Check Valves

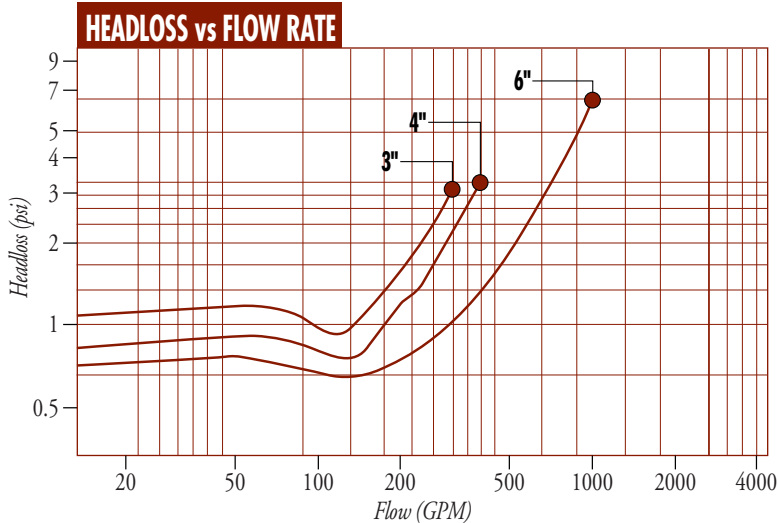

Product Advantages

- Made of engineered plastic materials.
- Operates under highly corrosive conditions.
- Spring loaded.
- Simple and easy to install - can be installed in any position.
- Minimum head loss - as the flap rises, its arm shortens resulting in a reduced movement and head loss reduction.
- Wafer type construction allows the Check Valve to be mounted between flanges.
- Multiple sizes to fit system requirements.
- 5 year warranty.

PART NUMBERS / ORDERING INFORMATION

Size	Check Valve	with Indicator Stem	with Electric Limit Switch	with Foot Valve
3"	65ARIN3	65ARIN3I	65ARIN3LS	65ARIN3FV
4"	65ARIN4	65ARIN4I	65ARIN4LS	65ARIN4FV
6"	65ARIN6	65ARIN6I	65ARIN6LS	65ARIN6FV



3" Check Valve

6" Check Valve

Applications

- For leaching and water applications.
- Reclamation projects.

Specifications

- Available in 3", 4", and 6" sizes
- Working pressure: 3 to 230 psi
- Mounts between flanges

Materials

3", 4" and 6" Check Valve

Body:	Nylon
Flap:	Nylon
Flap Seal:	EPDM Rubber
Spring:	Stainless Steel
O-Ring:	EPDM Rubber

DIMENSIONS & WEIGHT

Size	Height	Depth	Weight
3"	8.2"	3.0"	3.0 lbs
4"	8.6"	3.3"	3.5 lbs
6"	13.0"	4.2"	7.0 lbs



Check Valve with Electric Limit Switch



Check Valve with Indicator Stem



Check Valve with Foot Valve



NETAFIM USA
 5470 E. Home Ave. • Fresno, CA 93727
 888.638.2346 • 559.453.6800
 FAX 800.695.4753
www.netafimusa.com