


High Performance Micro-Sprinkler



Product Advantages:

- Highest distribution uniformity and maximum diameter - gentle, uniform droplets with complete coverage — no streaks or dry spots within pattern.
- Long-term reliable service:
 - Clog-resistant design.
 - Simple, modular parts.
 - Drop-down spinner that prevents entry of insects.
 - Restricting orifice stabilizes and directs stream to achieve strong, spinning motion.
 - Engineering-grade materials and heavy-duty bearing results in superior endurance.
 - Easy disassembly.
- Sprinkler mounting options:
 - Placed in the ground with MicroNet stake.
 - Threaded into an existing PE micro-tube as a replacement sprinkler.
- Universal Quick-Connect Thread - easily replaces most brands of jets or mini-sprinklers.

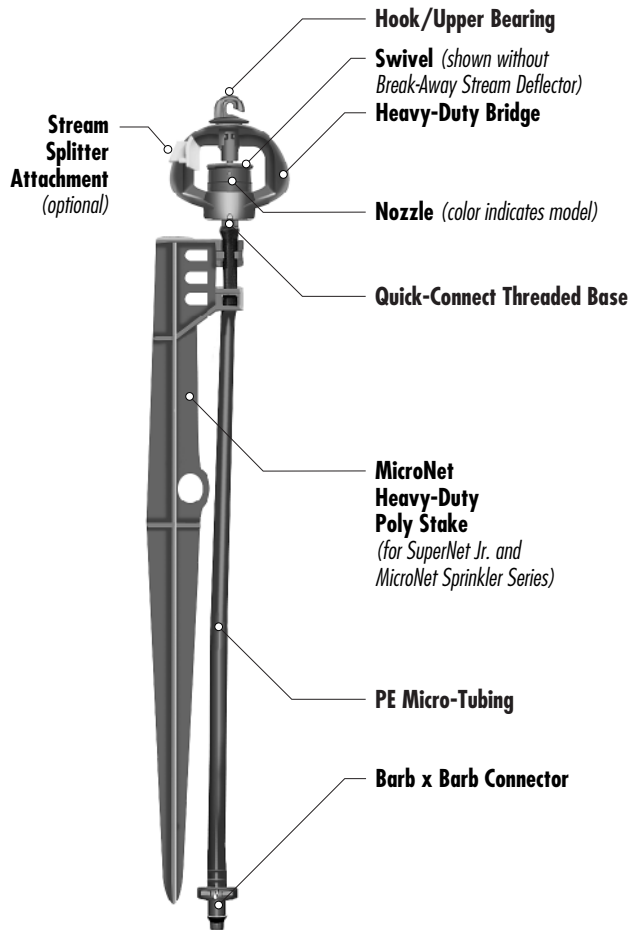

SuperNet Jr.
(Shown without Stake)

Applications:

- Evaporation
- Leaching
- Reclamation projects


Specifications:

Base connection option:
- Quick-Connect thread (standard)

Flow range: 6 - 50 GPH

Pressure range: 15 - 35 psi (recommended)

SUPERNET JR. Flow vs. Pressure

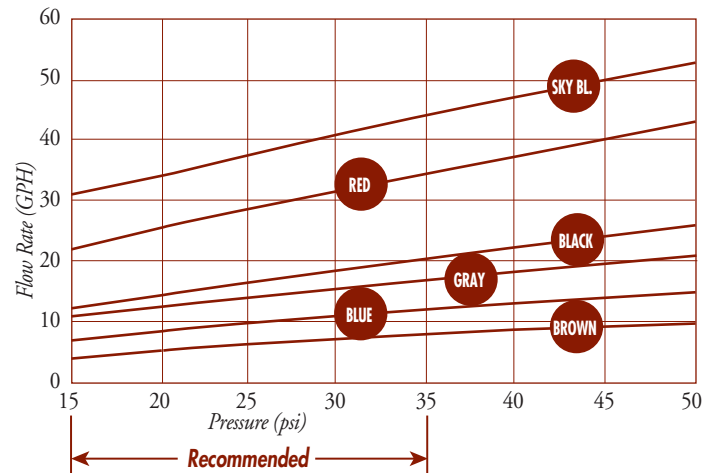

Supernet Jr. Technical Performance

SUPERNET JR APPLICATION RATES *GPM/Square Feet*

Color	Pressure (psi)	Flow GPH	10 x 10	DU	15 x 15	DU	20 x 20	DU
Black	20	17.9	0.0030	95%	0.0013	90%	0.00075	41%
Black	30	20.6	0.0034	87%	0.0015	85%	0.00086	49%
Red	20	30.6	0.0051	93%	0.0023	86%	0.0013	52%
Red	30	35.4	0.0059	89%	0.0026	89%	0.0015	71%
Turquoise	20	35.0	0.0058	88%	0.0026	86%	0.0015	66%
Turquoise	30	40.1	0.0067	89%	0.0030	87%	0.0016	82%

DU = Distribution Uniformity

Sprinkler Height - 8"

Not Recommended

SUPERNET JR - MAXIMUM LENGTH

PE Tubing	Color	Pressure (psi)	Flow (GPH)	Sprinkler Spacing (ft.)		
				10	15	20
3/4"	Black	20	17.9	310	390	480
		30	20.6	310	405	480
	Red	20	30.6	210	270	340
		30	35.4	220	285	340
	Turquoise	20	35.0	200	255	300
		30	40.1	200	255	300
1"	Black	20	17.9	440	570	680
		30	20.6	450	570	700
	Red	20	30.6	310	390	480
		30	35.4	310	405	480
	Turquoise	20	35.0	280	360	440
		30	40.1	290	375	440

Netafim USA - Delivering Total System Solutions for Mining

- Dripperlines • Filters • Valves • Air Vents • Sprinklers • Flow Meters



For more information call Netafim USA
Customer Service at (888) 638-2346.